

# Silicone RXPX Gauge Guard



BioPure Gauge Guard

## Features and benefits

- Available in silicone or EPDM
- USP Class VI compliant and Animal Derived Component Free (ADCF)
- Compliant with FDA regulations CFR 21 177.2600
- Lot numbering enables product traceability





## Technical specifications

	Silicone RXPX Gauge Guard
Gasket type	Isolator
Internal diameter	35.56 mm
Internal diameter	1.4 in
External diameter	50.29 mm
External diameter	1.98 in
Size	1.5 in
Quantity	25 PCS
Certification and compliance	ADCF, ISO Class 7, USP Class VI
Operating temperature range	-55 °C to 210 °C
Operating temperature range	-67 °F to 410 °F
Shelf life	5 years
Gamma stability	Max 50 kGy

## Materials of construction

	Silicone RXPX Gauge Guard
Material	Silicone

## Silicone RXPX Gauge Guard dimensions

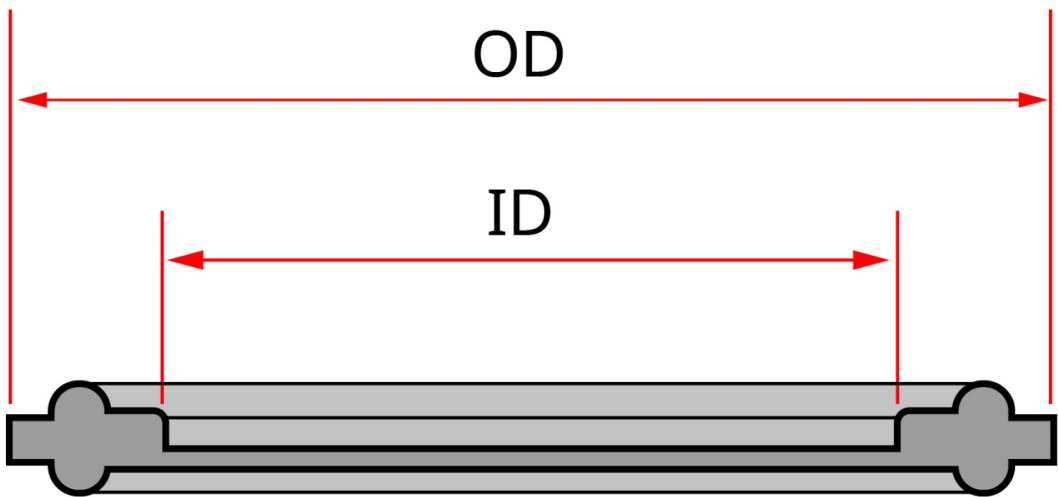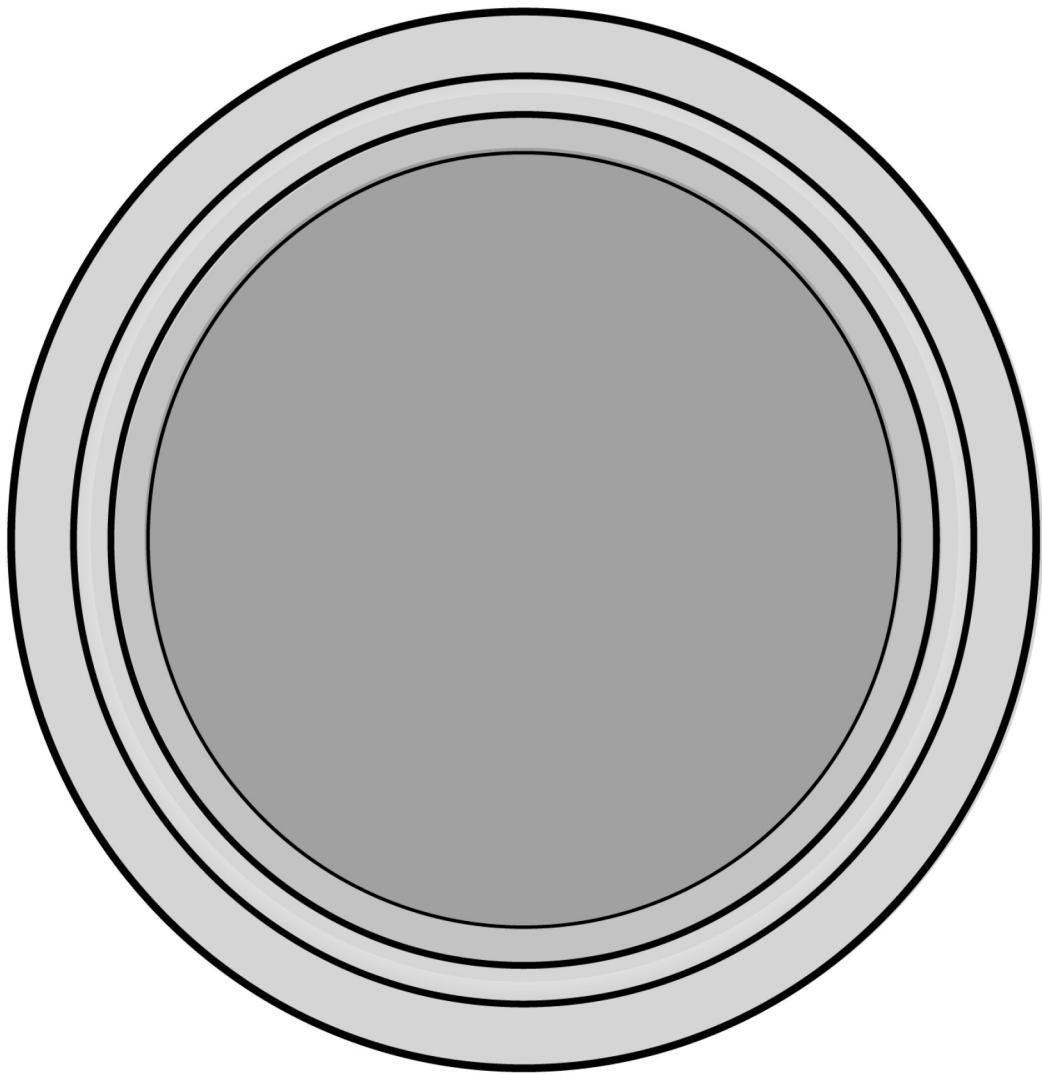

Size	ID (in)	OD (in)
1.5	1.4	1.98

---

Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the user's responsibility to ensure product suitability for use within their application. Watson-Marlow and WMArchitect are registered trademarks of Watson-Marlow Limited. BioClamp, BioBarb, FlatBioEndCap, BioEndCap, BioValve and BioTube applicator are Trademarks of BioPure Technology Limited. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. Q-Clamp is used under licence.

[wmfts.com/global](http://wmfts.com/global)



05 July 2024