


Viton A diaphragms

Viton diaphragms

Features and benefits

- All our diaphragms are laser-etched with cure dates and batch numbers, ensuring that they are completely traceable
- Excellent heat and chemical resistance
- Steam resistant version available
- Not suitable for use with ketones and esters

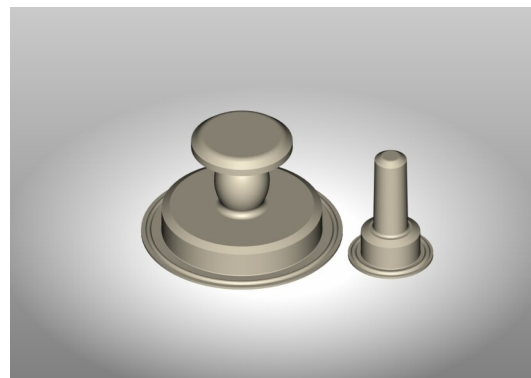

Technical specifications

	Viton A diaphragms
Colour	Cream
Diaphragm variant(s)	Bellows, Straight
Parylene treatment	No
Operating temperature range	-20 to 177 °C
Operating temperature range	-4 to 350 °F
	4.8
Max. operating pressure	70 psig
Compatible actuators	AJS, AKS
Shelf life	4 years
Material specification	Fluoropolymer elastomer
Standards	ASME BPE, RoHS
Certification and compliance	ADCF, BSE/TSE free, FDA 21CFR177.2600, USP <87>

Materials of construction

	Viton A diaphragms
	Synthetic rubber compound, Viton® A Cream Fluoropolymer Elastimer
Inserts	304 SS

Product codes

Disclaimer: The information contained in this document is believed to be correct but ASEPCO accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users responsibility to ensure product suitability for use within their application. Radial diaphragm is a trademark of ASEPCO Corporation. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. A member of Watson-Marlow Fluid Technology Group, A Spirax-Sarco Engineering plc company.

wmfts.com/global



01 August 2024