

Q-Clamp

Q-Clamp



Features and benefits

- Unique design for correct flange and gasket alignment
- Removes potential for gasket over-compression
- Closure system designed for ferrules aligned to ISO and ASME BPE standards
- Ease of one-handed assembly




Technical specifications

	Q-Clamp
Max. operating pressure	7 bar
Max. operating pressure	101 psi
Fluid temperature range	2 °C to 40 °C
Fluid temperature range	35 °F to 104 °F
Operating temperature range	-4 °C to 40 °C
Operating temperature range	23 °F to 104 °F
Sterilisation methods	Autoclave, Gamma, Vaporised Hydrogen Peroxide (VHP) compatible
Autoclave stability	135 °C (275 °F) for 30 minutes, repeatable 3 cycles
Gamma stability	Max 50 kGy Cumulative
Shelf life	3 years
Certification and compliance	ADCF, ISO 14644-1 Class 7, ISO 9001, ISO10993, USP Class VI
Compatibility	ISO, British and ASME Flanges
TC Size	½-¾ TC - 1-1½ TC in
Quantity	10, 50, 100 PCS

Materials of construction

	Q-Clamp
Material	Reinforced Nylon 66

Q-Clamp dimensions

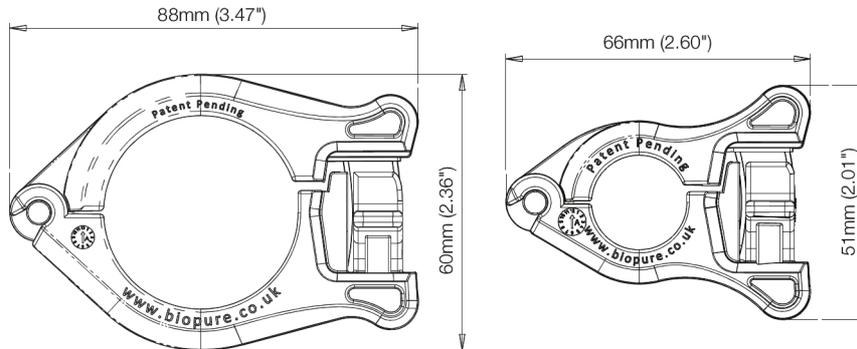

Product codes

Description	Partcode
Q-CLAMP, 1/2" - 3/4", 10 PCS/PK	1032-0075-0010
Q-CLAMP, 1/2" - 3/4", 100 PCS/PK	1032-0075-0100
Q-CLAMP, 1" - 1 1/2", 10 PCS/PK	1032-0150-0010
Q-CLAMP, 1" - 1 1/2", 50 PCS/PK	1032-0150-0050
Q-CLAMP TAMPER EVIDENT COVER, CLEAR, 100 PCS/PK	1033-0001-0100
Q-CLAMP TAMPER EVIDENT COVER, BLUE, 100 PCS/PK	1033-0002-0100
Q-CLAMP TAMPER EVIDENT COVER, GREY, 100 PCS/PK	1033-0003-0100
Q-CLAMP TAMPER EVIDENT COVER, ORANGE, 100 PCS/PK	1033-0004-0100
Q-CLAMP TAMPER EVIDENT COVER, YELLOW, 100 PCS/PK	1033-0005-0100
Q-CLAMP TAMPER EVIDENT COVER, RED, 100 PCS/PK	1033-0006-0100
Q-CLAMP TAMPER EVIDENT COVER, GREEN, 100 PCS/PK	1033-0007-0100
Q-CLAMP TAMPER EVIDENT COVER, PURPLE, 100 PCS/PK	1033-0008-0100

Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the user's responsibility to ensure product suitability for use within their application. Watson-Marlow and WMArchitect are registered trademarks of Watson-Marlow Limited. BioClamp, BioBarb, FlatBioEndCap, BioEndCap, BioValve and BioTube applicator are Trademarks of BioPure Technology Limited. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. Q-Clamp is used under licence.

wmfts.com/global



04 July 2024