

# Standard PTFE Gaskets

PTFE gaskets



## Features and benefits

- Designed in accordance with ASME-BPE standards
- USP Class VI compliant and animal derived component free (ADCF)
- Compliant with FDA regulations CFR 21 177.2601
- Lot numbering enables product traceability
- Performs in extreme temperature conditions. Ranging from -350 °F to 450 °F




## Technical specifications

|                             | Standard PTFE Gaskets      |
|-----------------------------|----------------------------|
| Gasket type                 | Unflanged                  |
| Internal diameter           | 22.4 - 148.3 mm            |
| Internal diameter           | 0.88 - 5.84 in             |
| External diameter           | 50.3 - 166.9 mm            |
| External diameter           | 1.98 - 6.57 in             |
| Size                        | 1, 1.5, 2, 2.5, 3, 4, 6 in |
| Quantity                    | 25 PCS                     |
| Certification               | ADCF, USP Class VI         |
| Operating temperature range | -212 to 232 °C             |
| Operating temperature range | -350 to 450 °F             |
| Shelf life                  | 20 years                   |

## Materials of construction

|          | Standard PTFE Gaskets |
|----------|-----------------------|
| Material | PTFE                  |

Product codes

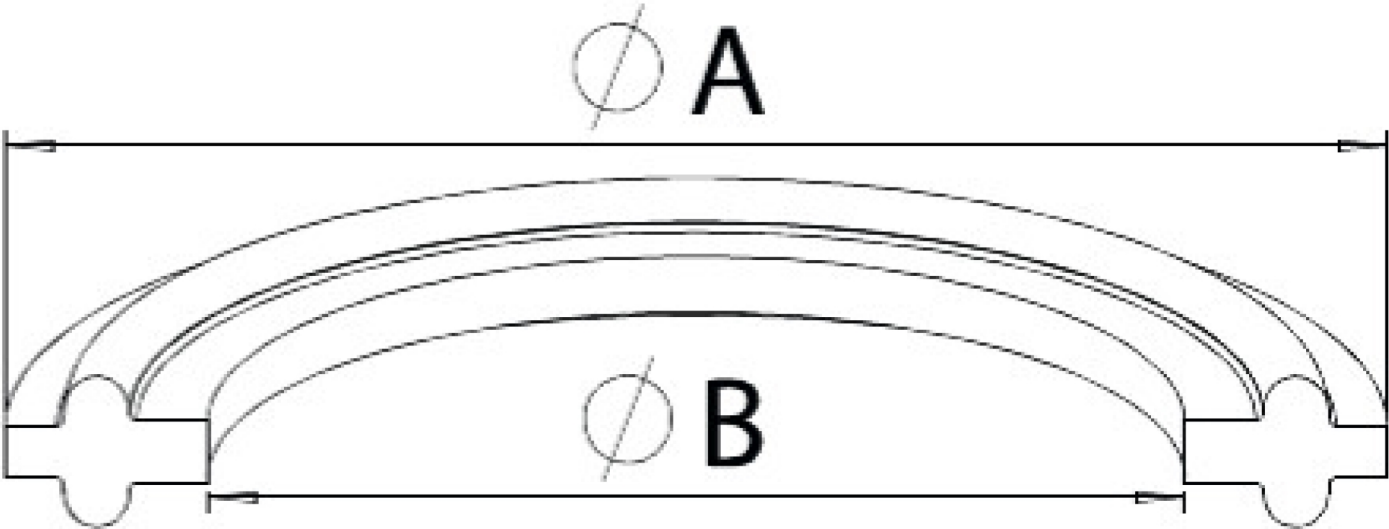

| Part number  | Size inch | I.D (B) inch(mm) | O.D (A) inch(mm) | Quantity |
|--------------|-----------|------------------|------------------|----------|
| 40MPG-100-25 | 1         | 0.88 (22.4)      | 1.98 (50.3)      | 25       |
| 40MPG-150-25 | 1 1/2     | 1.38 (35.1)      | 1.98 (50.3)      | 25       |
| 40MPG-200-25 | 2         | 1.88 (47.8)      | 2.52 (64.0)      | 25       |
| 40MPG-250-25 | 2 1/2     | 2.38 (60.5)      | 3.05 (77.5)      | 25       |
| 40MPG-300-25 | 3         | 2.88 (73.2)      | 3.58 (90.9)      | 25       |
| 40MPG-400-25 | 4         | 3.84 (97.5)      | 4.68 (118.9)     | 25       |
| 40MOG-600-25 | 6         | 5.84 (148.3)     | 6.57 (166.9)     | 25       |

Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the user's responsibility to ensure product suitability for use within their application. Watson-Marlow and puresu are registered trademarks of Watson-Marlow Limited. BioClamp, BioBarb, FlatBioEndCap, BioEndCap, BioValve and BioTube applicator are Trademarks of BioPure Technology Limited. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. Q-Clamp is used under licence.

[wmfts.com/global](https://wmfts.com/global)



20 February 2024